
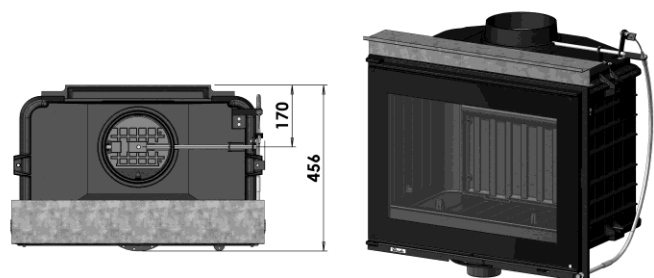


WOOD: cast iron, lateral

Essential line (SOLO)


F70L

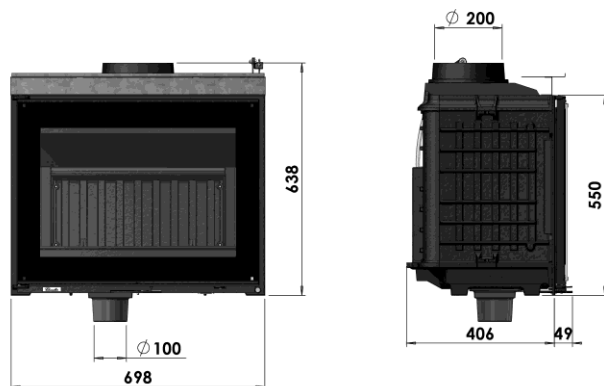

Energy class : A+

Minimum section for
convection air outlet :
700 cm²

Section of combustion
air inlet : 200 cm² or
diameter of the
combustion air inlet, in
the case of an outside
air connection : 100Ø

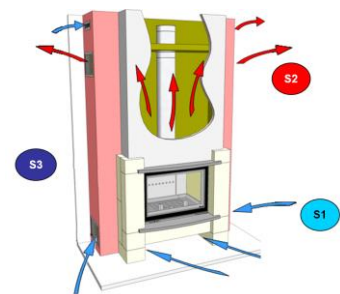

Minimum section for
convection air inlet :
600 cm² mini

Characteristics		
Nominal power	9,50	kW
Minimal power	4,50	kW
Efficiency	80,60	%
Fuel	Wood	
Log length	50	cm
Loading weight	2/4	Kg
CO at 13% of O ₂	0,1100	%
CO ₂ rate	9,0000	%
Flue gas mass flow	0,00	g/s
Average flue gas temperature	-	°C
Draught pressure	12	Pa
Particulate matter	38	mg/Nm ³
Flue gas exit connection	200 Top	mm
Air inlet connection	100	mm
Overall dimensions	69.8 x 45.6 x 63.8	cm
Glass dimensions	660 x 487 x 4	mm
Net Weight	137	Kg
Operation	Closed door	
Classification	Intermittent	
European Standard	EN 13229	
DoP nr	33	
Warranty	10	Years

Chazelles
CHEMINÉES - INSERTS - POÊLES

CHINVEST - Route de Marthon - 16380 Chazelles - France - www.chazelles.com